



sylvana
CLICK FLOORING



SYLVANA

Sylvana Click Flooring offers it all – superior wood designs, supreme durability, and the simplicity of click and lock installation with no adhesives. With its wide range of wood species and crystal clear visuals, Sylvana provides the depth of color and graining that is required for creatively designed interiors. Using high quality raw materials and superior manufacturing process, Sylvana can exceed the performance of standard vinyl plank floors.

Retail: Restaurants, retail stores, and retail service facilities.

Hospitality: Hotel/motel corridors and rooms, convention areas, and clubs.

Assisted Living Facilities: Hallways, rooms, eating areas, and congregation areas.

Multi-Level Housing: Apartment complexes, student housing, and short-term residences.



Platinum Maple – CPAM




Honey Cashew – CHON



Blush Rose – CROS



Heritage – CHER

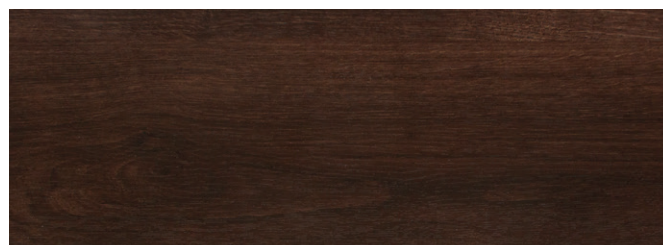

Mocha – CMOC



Frost Gray – CFRO



Golden – CGOL




Ridge Line – CRID



Chestnut – CCNT



Pacific Wood – CPAC

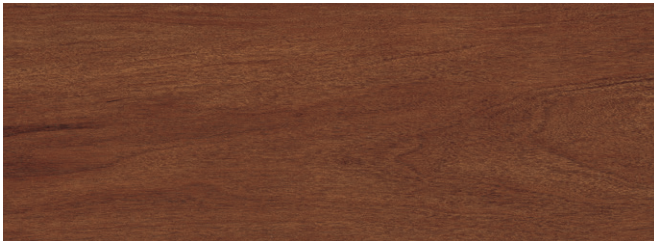

Dark Cherry – CCHE




Aged Ash – CAGA



Cinnamon Bark – CCIN



Darkened Tan – CTAN

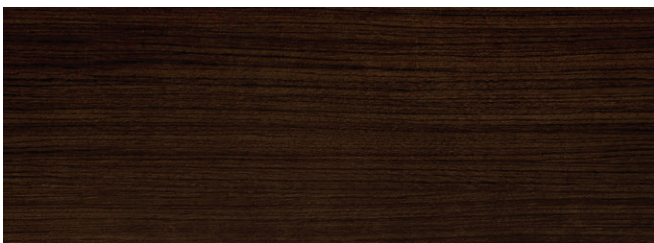

Chocolate Ribbon – CCHO



Wintered Ash – CWSH



Steel Stripe – CSTE



Tahoe Black – CTAH

Sylvana

CLICK FLOORING

Sylvana's rugged construction resists scuffing, chipping, and permanent indentations, while helping hide minor substrate irregularities. Its 10-year commercial wear warranty makes it the perfect solution for your high traffic commercial areas.

SPECIFICATIONS

Size:	7.25" x 48" plank
Gauge:	5mm
Wear Layer:	20mil
Weight:	33.7 lbs per carton
Packaging:	8 planks (19.3 sq ft in a carton)
Texture:	Embossed
Color Pattern:	Wood grain print film



Approved Adhesives

- Excelsior™ SP-500 Acrylic Aerosol
- Excelsior™ AP-520 Acrylic Roll-On

Green Information

- Manufactured with 72% recycled content – 39% post-consumer recycled material and 33% pre-consumer recycled material
- 100% recyclable

Maintenance

Initial – Sweep, Dust Mop or Vacuum any debris from installation.

Daily – Sweep, Dust Mop or Vacuum to remove dirt and particulates.

Routine – Auto Scrub with a white pad and a mild neutral PH cleaner.

Cleaners – Use premium cleaners specifically for vinyl flooring.

Sealer and/or Finish – Not required.

Warranty

Ten (10) Year Limited Commercial Warranty

Twenty (20) Year Limited Residential Warranty



- Rugged construction and UV cured ceramic bead finish provides durability straight from the factory
- Ease of maintenance – Sylvana Click Flooring requires no initial floor finishes in its maintenance program due to factory finish
- Slip Co-Efficient of Friction of > .6 (dry) [ASTM D 2047]
- ASTM F970 Static Load – Modified: 1000 PSI
- Factory finish resists Staph and E. Coli spread/growth
- Excellent dimensional stability due to glass fiber inner layer
- Sylvana's non-porous surface is resistant to absorption of soils, spirits, and moisture

For complete Maintenance and Warranty information, visit www.procedoflooring.com

sylvana | 3mm & 2mm VINYL PLANK

Procedo's Sylvana Vinyl Plank provides the warmth of wood with the durability and ease of maintenance of vinyl. With its rugged construction and UV finish, Sylvana Vinyl Plank provides durability straight from the factory. The plank's solid finish also provides resistance to absorption of soils, spirits, and moisture. Constructed from 72% recycled materials, Sylvana Vinyl Plank provides an environmentally friendly product option. The surface of the plank includes an embossed surface to enhance the rich look of wood, while adding slip resistance properties to the plank. Precision cutting allows for easy installation with tight seaming. Designed for commercial and residential applications, Sylvana Vinyl Plank is the perfect option for almost any applications.



SPECIFICATIONS

Size: 6" x 48" plank
Gauge: 3mm Nominal 1/8" (.120")
Wear Layer: .020" (20 mil)

Size: 6" x 48" plank
Gauge: 2mm Nominal .080"
Wear Layer: .008" (8 mil)

Texture: Embossed

Color Pattern: Wood grain print film

Approved Adhesives

- Excelsior™ SP-500 Acrylic Aerosol
- Excelsior™ AW-510 Acrylic Wet Set
- Excelsior™ AP-520 Acrylic Roll-On
- Excelsior™ MS-700 Modified Silane
- Excelsior™ EW-710 Epoxy Wet-Set

Green Information

- May contribute to LEED® CI and NC credits MR 4
- 72% Recycled Material – 39% Post-Consumer Recycled Materials & 33% Pre-Consumer Recycled Materials
- 100% Recyclable

Maintenance

Initial – Sweep, Dust Mop or Vacuum any debris from installation.

Daily – Sweep, Dust Mop or Vacuum to remove dirt and particulates.

Routine – Auto Scrub with a white pad and a mild neutral PH cleaner.

Cleaners – Use premium cleaners specifically for vinyl flooring.

Sealer and/or Finish – Not required.

Warranty – 3mm

Limited Twenty (20) Year Commercial Wear Warranty
Limited Thirty (30) Year Residential Wear Warranty

Warranty – 2mm

Limited Eight (8) Year Commercial Wear Warranty
Limited Twenty (20) Year Residential Wear Warranty

Vinyl Plank applications include:

Residential, multi-level housing, healthcare, retail, hospitality, and corporate installations.



Procedo

FLOORING

1401 East 6th Street
Tuscumbia, AL 35674
Phone: 866.955.8291
Fax: 419.436.4302

procedoflooring.com

Availability

Products are available for purchase directly from Procedo Flooring at (866) 955-8291. Procedo products are represented by a local representative. Please visit ProcedoFlooring.com for contact information for Procedo Customer Service or to find your local Procedo Sales Representative.

Samples

Available by request at ProcedoFlooring.com, contacting Procedo's Customer Service Department, or your Procedo Flooring Sales Representative.