



maxime plus

maxime plus
RUBBER FLOORING





Maxime Plus Rubber Flooring is the result of an industry-leading process that eliminated delamination, featuring a formulation that is free of Red List chemicals and no tire-derived crumb rubber. The improved manufacturing process also eliminates the need to seal the floor, reducing the time and costs associated with maintenance.

The Lifetime Delamination Warranty plus a lower life-cycle cost over the extended life of the flooring delivers guaranteed performance for the most demanding environments.

Multi-purpose: Education multi-purpose areas, latchkey/daycare areas, animal care areas including veterinarian offices, doggy daycare or grooming, retail display areas.

Sports: Weight rooms, training rooms, locker rooms, workout areas including free weight areas or under workout equipment.

Healthcare: Rehabilitation or therapy areas, or long-term care areas that receive heavy foot traffic.




Tropical Sand




MS01

Light Ash

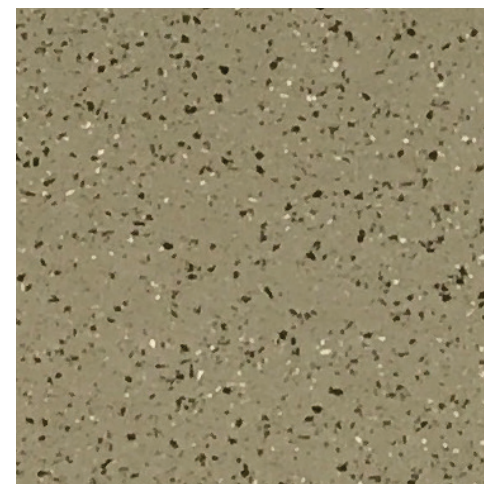


MS02

Salt & Pepper

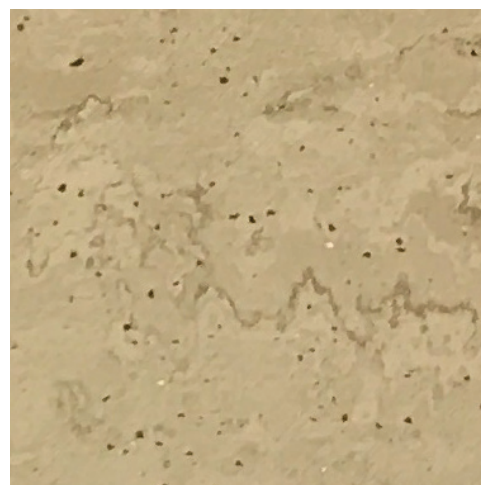


MM01

Marbleized

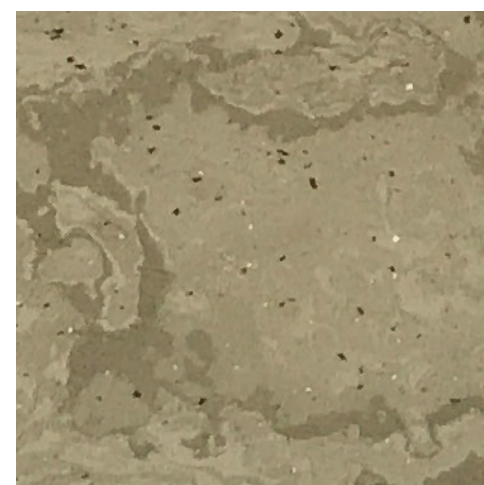


MM02

Speckled/Chipped

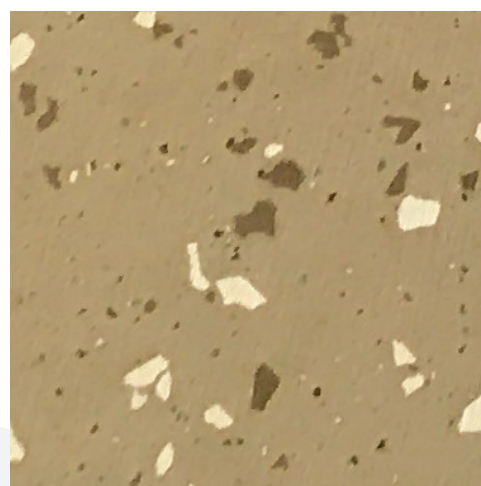

MC01

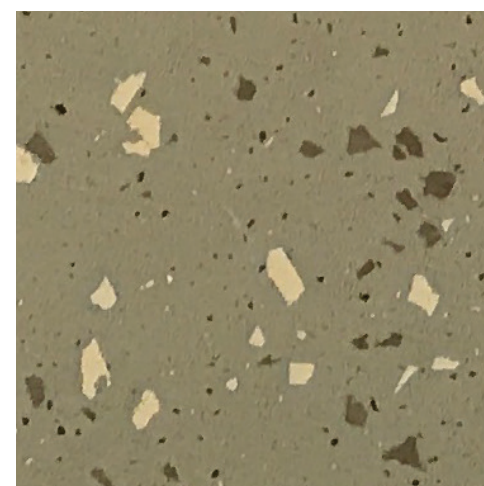

MC02

Volcanic Black



MS03

Gray Mist




MS04


Root Brown




MS05

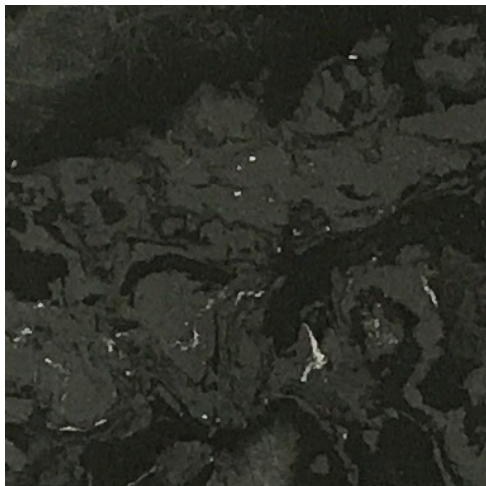


MM03

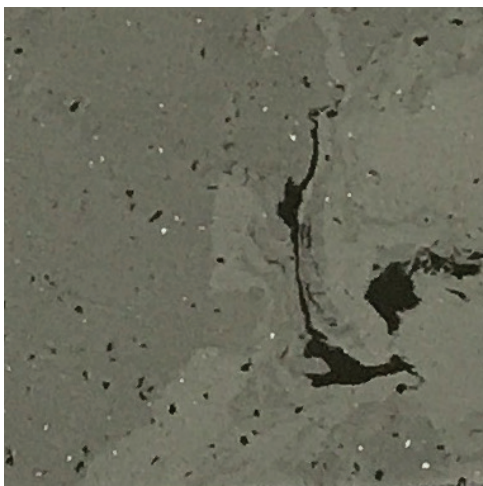


MM04

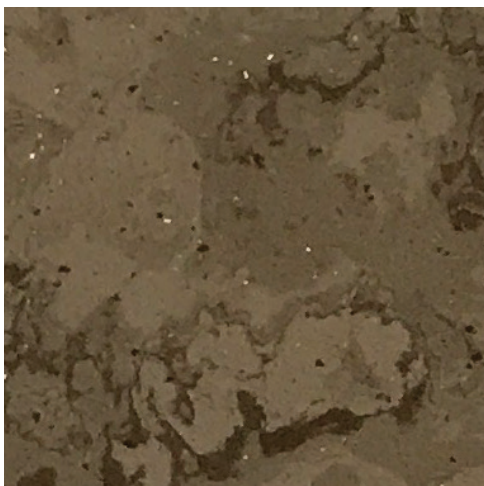


MM05

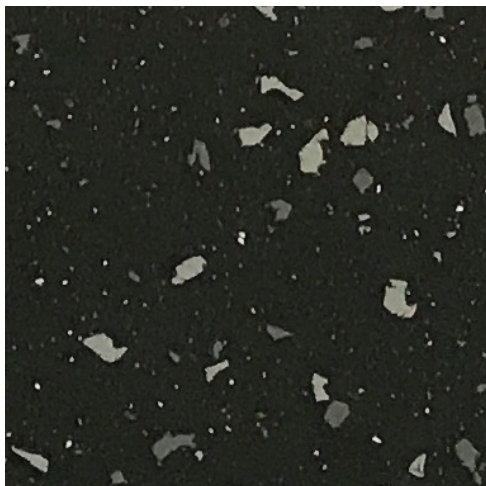

MC03

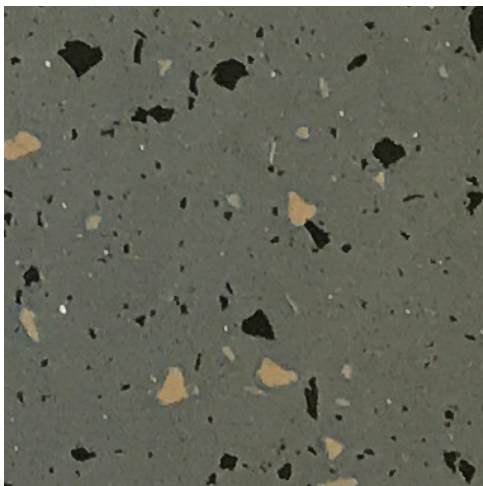

MC04

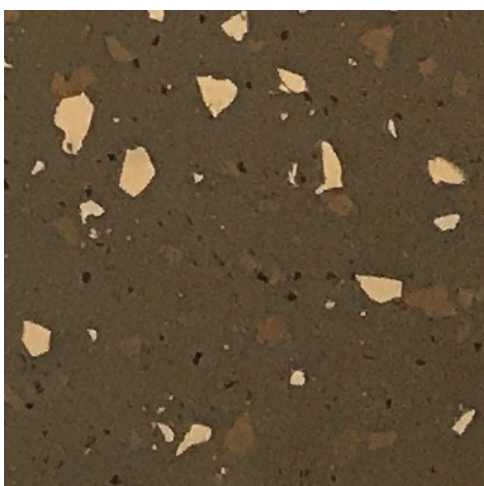

MC05

Maxime Plus Rubber Flooring includes Salt & Pepper, Marbleized, and Speckled/Chipped patterns. Samples above may or may not completely show the Marbleized pattern. Distance of the observer from the physical samples affects relative appearance of rubber chips and marble patterns. The images in the folder are provided for your reference only and should not be used as the final basis for choosing a particular style of flooring. For a larger visual sample, please contact us at (866) 955-8291 or order online at procedoflooring.com.



maxime plus

FEATURES + BENEFITS

RUBBER FLOORING

Maxime Plus Rubber Flooring is a PVC-Free recycled engineered rubber tile that will not delaminate and features a lifetime delamination warranty. From sports flooring areas to multi-purpose areas, Maxime Plus will stand up to free weights, heavy foot traffic and high-impact use. In fact, it exceeds OSHA and ADA standards for excellent traction and durability.



- 3/8" Gauge thickness with EPDM and SBR combination face coat; PVC-Free and Red List Chemical Free formulation without the use of crumb rubber.
- Recycled pre-consumer rubber base designed for closed-loop recycling with chips from rubber flooring diverted from landfill.
- Ease of maintenance – requires no floor finishes in its maintenance program.
- Permanent vulcanized bond for an engineered product with lifetime delamination warranty.
- Exclusive 10-year aging performance warranty. Meets or exceeds minimum performance attributes for light stability when tested using ASTM F1515.

Warranty

Limited Ten (10) Year Commercial Warranty
Lifetime Delamination Warranty

Green Information

- **100% recyclable.**
- **Red List Chemical Free.**
- Conforms to SCS Recycled Content Standard V7.0 for a **Minimum 33% Pre-Consumer Recycled Rubber Content.**
- **Durable PVC-Free formula** reduces the needs for chemical intensive (strippers and waxes) maintenance program.
- **FloorScore® certified** and meets **NSF332 Platinum** and **CHPS criteria.**
- **Qualifies for LEED credits;** Adhesives meet CHPS & LEED guidelines.



Please refer to procedoflooring.com for the most up-to-date certifications.

Maintenance

Ease of maintenance – Maxime Plus Rubber Flooring requires significantly less floor maintenance and chemicals than standard commercial flooring products.

Initial – Wet scrub with neutral pH cleaner, dry buff for luster.

Daily – Sweep, Dust Mop or Vacuum to remove dirt and particulates.

Routine – Wet scrub with neutral pH cleaner, dry buff to increase luster.

Sealer and/or Finish – Not required, can be added to improve maintenance procedures.

Please refer to procedoflooring.com for more detailed maintenance guidelines.



Procedo
FLOORING

SPECIFICATIONS

Tile Size: 27" x 27" Square Edge Tiles
25-3/4" x 25-3/4" Interlocking Tiles

Gauge: 3/8" (.375")

Weight: Approx. 14 lbs per Tile – Square Edge Tiles
Approx. 12 lbs per Tile – Interlocking Tiles

Packaging: Maximum 100 Tiles per Pallet

Texture: Smooth

Color Patterns: Salt & Pepper, Marbleized, and Speckled/Chipped; 3 Designs in 5 Colors

Recommended Adhesives:
MS-700 Modified Silane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive


Please refer to procedoflooring.com for detailed installation and maintenance instructions.



maxime plus

RUBBER FLOORING

 **Lifetime
Delamination
Warranty**

 **Red List Chemical Free;
NO Phthalates, PVC, Cyanates
or Formaldehyde;
NO Tire-Derived Crumb Rubber**

 **Exclusive
10-Year Aging
Performance
Warranty**



Maxime Plus sources only Red List Chemical Free recognized materials as identified by the International Living-Future Institute.

ASTM D2047	– Coefficient of Friction: >0.8
ASTM E648	– Critical Radiant Flux: Class I, >0.45 W/cm ²
ASTM D2240	– Hardness: Shore A; 70 +/- 5
ASTM F970	– Static Load Limit: Pass, > 250 PSI
ASTM F970	– Static Load Limit: Modified for Max Weight: 1,000 PSI
ASTM E90	– Sound Transmission Loss: 52 STC*, 63 STC**
ASTM E492	– Impact Sound Transmission: 52 IIC*, 67 IIC**
ASTM E2179	– Delta Impact Insulation: 22 ΔIIC*
ASTM F1515	– Light Stability: Passes ΔE < 8


HPD Available, EPD Available
Qualifies for LEED Credits, 100% Recyclable

Please refer to procedoflooring.com for the most up-to-date ASTM information.


Choose from square edge or interlocking styles.



27" x 27" square edge, 5.06 sq. ft. per tile

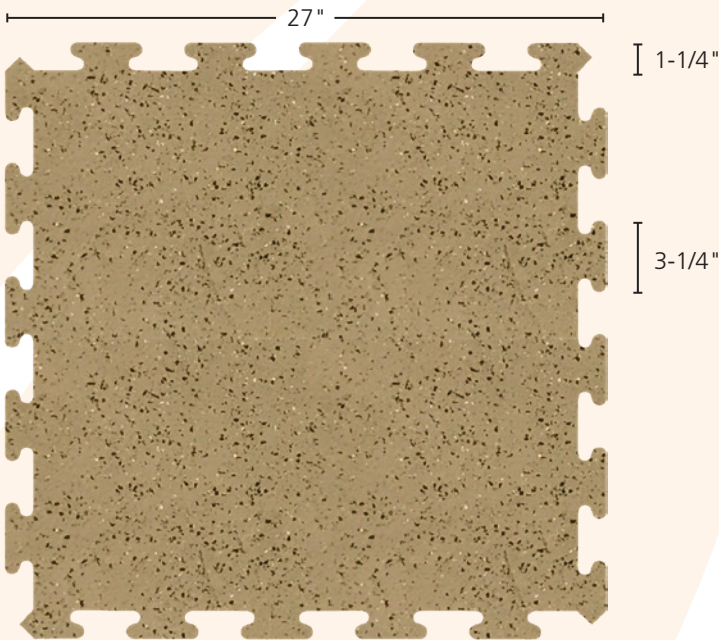

25-3/4" x 25-3/4" interlocking, 4.6 sq. ft. per tile

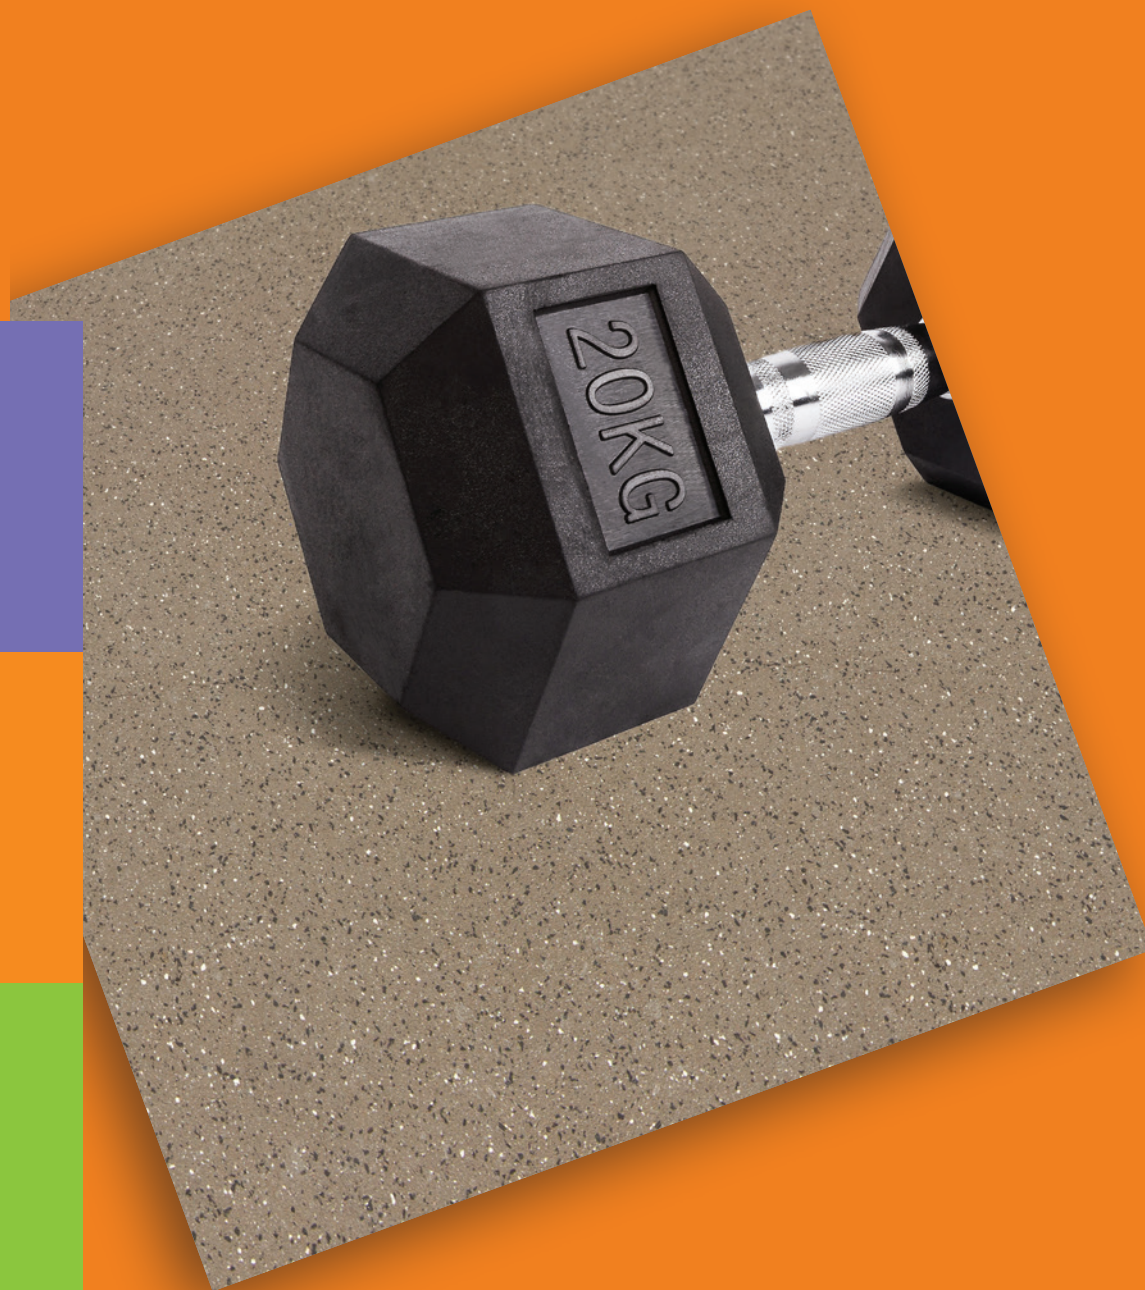

1401 East 6th Street
Tuscumbia, AL 35674
Phone: 866.955.8291
Fax: 419.436.4302

procedoflooring.com

Availability

Products are available for purchase directly from Procedo Flooring at (866) 955-8291. Procedo products are represented by a local representative. Please call Procedo Customer Service to find your local Procedo Sales Representative.

Samples

Available by request at procedoflooring.com, contacting Procedo's Customer Service Department, or your Procedo Flooring Sales Representative.

