


## TECHNICAL DATA

|   |   |
|---|---|
| <b>ASTM E84 - Surface Burning</b>                   | Class A   |
| <b>ASTM E648 (NFPA 253) - Critical Radiant Flux</b> | Class 1, $\geq 0.45 \text{ W/cm}^2$   |
| <b>ASTM E662 (NFPA 258) - Smoke Density</b>         | Passes, $\leq 450$  |
| <b>Acclimation Time</b>                             | 48 Hours, see installation instructions for details   |
| <b>Service &amp; Storage Temperature</b>            | 65° - 85° F, see installation instructions for details  |
| <b>Sustainability Information</b>                   | Contributes to LEED v4/4.1<br>Meets CA 01350 Requirements<br>FloorScore Certification*                        |
| <b>Warranty</b>                                     | 1 Year Commercial, see warranty document for details  |
| <b>Recommended Adhesives</b>                        | Excelsior EN-610, Epoxy Nose Filler<br>Excelsior C-630, Contact Adhesive<br>Excelsior U-705, Urethane Wet-Set |
| <b>Adhesives Not Recommended</b>                    | Pressure Sensitive and Tapes can allow the material to shrink if stretched during installation                |
| <b>Technical Support</b>                            | <a href="mailto:solutions@rhctechnical.com">solutions@rhctechnical.com</a>                                    |
| <b>Product Support</b>                              | <a href="mailto:support@procedoflooring.com">support@procedoflooring.com</a>                                  |
| <b>Technical Documentation</b>                      | <a href="http://www.procedoflooring.com">www.procedoflooring.com</a>  |

## PRODUCT DESCRIPTION

Reducer designed to transition from .375" flooring to nothing.

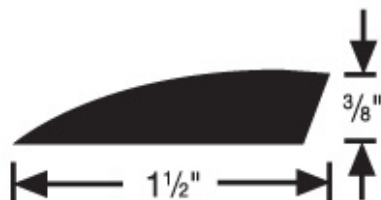

Attach color submittal sample here