

Available Lengths	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
Finish	Smooth Raised Disc with Abrasive Strip
Available Abrasive Strip Colors	Yellow, Black, White, & Glow in the Dark
ASTM F2169 - Resilient Stair Treads	Type TS, Class 2, Group 1 & 2, Grade 1
ASTM E648 (NFPA 253) - Critical Radiant Flux	Class 1, $\geq 0.45 \text{ W/cm}^2$
ASTM E662 (NFPA 258) - Smoke Density	Passes, ≤ 450
CAN/ULC-S102.2 - Surface Burning	115 Flame Spread Rating 275 Smoke Developed Classification
ASTM D2047 - Static Coefficient of Friction	≥ 0.80
Acclimation Time	48 Hours, see installation instructions for details
Service & Storage Temperature	65° - 85° F, see installation instructions for details


Sustainability Information	Contributes to LEED v4/4.1 Meets CA 01350 Requirements FloorScore Certification*
Warranty	10 Year, see warranty document for details

Recommended Adhesives	Excelsior TP-620, Pressure Sensitive Tread Tape Excelsior EN-610, Epoxy Nose Filler Excelsior AW-510, Wet-Set Acrylic Excelsior C-630, Contact Adhesive Excelsior U-705, Urethane Wet-Set
------------------------------	---

Technical Support	solutions@rhctechnical.com
Product Support	support@procedoflooring.com
Technical Documentation	www.procedoflooring.com

*certificate or document available on website

Rubber Stair Treads are specifically designed for use on all interior stairs, including pan-filled concrete and wood steps. Rubber Stair Treads are made from specially formed compression-molded high-grade synthetic rubber compound making a solid, homogeneous and resilient rubber stair tread.

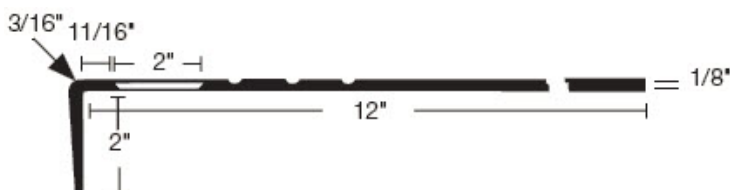

Attach color submittal sample here