


<b>Available Lengths</b>	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
<b>Finish</b>	Smooth Raised Disc
<b>ASTM F2169 - Resilient Stair Treads</b>	Type TS, Class 2, Grade 1
<b>ASTM E648 (NFPA 253) - Critical Radiant Flux</b>	Class 1, $\geq 0.45$ W/cm <sup>2</sup>
<b>ASTM E662 (NFPA 258) - Smoke Density</b>	Passes, $\leq 450$
<b>CAN/ULC-S102.2 - Surface Burning</b>	115 Flame Spread Rating 275 Smoke Developed Classification
<b>ASTM D2047 - Static Coefficient of Friction</b>	$\geq 0.80$
<b>Acclimation Time</b>	48 Hours, see installation instructions for details
<b>Service &amp; Storage Temperature</b>	65° - 85° F, see installation instructions for details
<b>Sustainability Information</b>	Contributes to LEED v4/4.1 Meets CA 01350 Requirements FloorScore Certification*
<b>Warranty</b>	10 Year, see warranty document for details
<b>Recommended Adhesives</b>	Excelsior TP-620, Pressure Sensitive Tread Tape Excelsior EN-610, Epoxy Nose Filler Excelsior AW-510, Wet-Set Acrylic Excelsior C-630, Contact Adhesive Excelsior U-705, Urethane Wet-Set
<b>Technical Support</b>	<a href="mailto:solutions@rhctechnical.com">solutions@rhctechnical.com</a>
<b>Product Support</b>	<a href="mailto:support@procedoflooring.com">support@procedoflooring.com</a>
<b>Technical Documentation</b>	<a href="http://www.procedoflooring.com">www.procedoflooring.com</a>

\*certificate or document available on website

Rubber Stair Treads are specifically designed for use on all interior stairs, including pan-filled concrete and wood steps. Rubber Stair Treads are made from specially formed compression-molded high-grade synthetic rubber compound making a solid, homogeneous and resilient rubber stair tread.

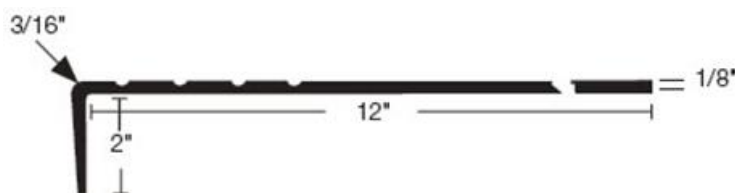

Attach color submittal sample here