



Rubber Stair Tread Product Submittal

STRINGERS

Available Lengths	72"
Finish	10" Height x 0.080" Thickness 12" Height x 0.080" Thickness
ASTM E648 (NFPA 253) - Critical Radiant Flux	Class 1, $\geq 0.45 \text{ W/cm}^2$
ASTM E662 (NFPA 258) - Smoke Density	Passes, ≤ 450
CAN/ULC-S102.2 - Surface Burning	115 Flame Spread Rating 275 Smoke Developed Classification
ASTM F925 - Chemical Resistance	Excellent with chemicals listed in standard, Additional chemicals available via chart
ASTM F1514 - Heat Stability	Excellent, $\Delta E \leq 8$
Sustainability Information	Made in the U.S.A. Meets Buy America Act (49 CFR Part 661) Meets Buy American Act (41 USC §§ 8301-8303) Contributes to LEED v4/4.1 FloorScore Certification Meets CA 01350 Requirements
Acclimation Time	48 Hours
Service & Storage Temperature	65° - 85° F
<i>See installation document for full installation details regarding approved substrates, job site conditions and acclimation procedures.</i>	
Product Warranty	5 Years
<i>See product warranty for full details regarding limitations and warranty coverage.</i>	
Approved Adhesives	Excelsior TP-620, Pressure Sensitive Tread Tape Excelsior AW-510, Wet-Set Acrylic Excelsior C-631, Contact Adhesive



Rubber Stair Tread Product Submittal

STRINGERS

Technical Support


solutions@rhctechnical.com

Product Support

support@procedoflooring.com

Technical Documentation

www.procedoflooring.com

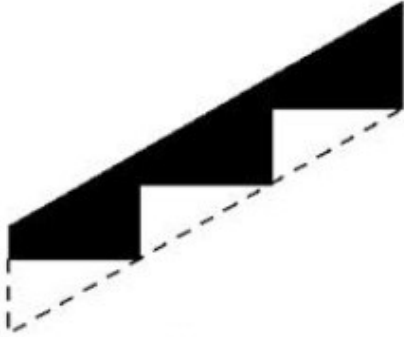

Attach Color Sample Here